

OWNER'S MANUAL

APEX PRO 6500 YAMAHA MT-09

Art. no. 53000183en



Congratulations on your decision to purchase a WP chassis component. You are now the owner of a state-of-the-art sports chassis that you will continue to enjoy for a long time if you maintain it properly.

We wish you good and safe riding at all times!

The Owner's Manual contained the latest information for this model series at the time of going to print. However, minor differences due to further developments in design cannot be ruled out completely.

All specifications contained herein are non-binding. WP Suspension GmbH specifically reserves the right to modify or delete technical specifications, prices, colors, forms, materials, services, designs, equipment, etc., without prior notice and without providing reasons, to adapt these to local conditions, as well as to stop the production of a particular model without prior notice. WP accepts no liability for delivery options, deviations from figures and descriptions, misprints, and other errors. The models portrayed partly contain special equipment that does not belong to the regular scope of supply.

© 2019 WP Suspension GmbH, Mattighofen Austria

All rights reserved

Reproduction, even in part, as well as copying of all kinds, is permitted only with the express written permission of the copyright owner.




WP Suspension GmbH
Stallhofnerstraße 3
5230 Mattighofen, Austria

This document is valid for the following models:

APEX PRO 6500 YAMAHA MT-09 (53.27.2Q.81)



TABLE OF CONTENTS

1	MEANS OF REPRESENTATION.....	3	8.3	Adjusting the compression damping of the fork.....	13
1.1	Symbols used	3	8.4	Adjusting the rebound damping of the fork.....	14
1.2	Formats used	3	8.5	Adjusting the spring preload of the fork.....	14
2	SAFETY ADVICE	4	9	TECHNICAL DATA	16
2.1	Use definition – intended use	4	9.1	Fork.....	16
2.2	Misuse.....	4	10	SUBSTANCES.....	17
2.3	Safety advice	4	11	STANDARDS	18
2.4	Degrees of risk and symbols	4	12	INDEX OF SPECIAL TERMS	19
2.5	Safe operation.....	5	13	LIST OF ABBREVIATIONS	20
2.6	Work rules.....	5		INDEX.....	21
2.7	Environment.....	5			
2.8	Owner's Manual.....	5			
2.9	Correct installation.....	5			
2.10	Chassis tightening torques	6			
3	IMPORTANT NOTES	7			
3.1	Manufacturer and implied warranty	7			
3.2	Fuel, auxiliary substances.....	7			
3.3	Spare parts, accessories	7			
3.4	Service	7			
3.5	Figures	7			
3.6	Customer service.....	7			
4	SERIAL NUMBERS.....	8			
4.1	Cartridge article number	8			
5	PREPARING FOR USE.....	9			
5.1	Advice on preparing for first use.....	9			
5.2	Checks and maintenance measures when preparing for use	9			
6	SERVICE SCHEDULE.....	10			
6.1	Additional information.....	10			
6.2	Required work.....	10			
6.3	Recommended work.....	10			
7	SERVICE WORK ON THE CHASSIS	11			
7.1	Raising the motorcycle with work stand 	11			
7.2	Removing the standard fork legs 	11			
7.3	Installing the WP PRO COMPONENTS fork legs 	11			
7.4	Bleeding the fork legs	12			
7.5	Removing the motorcycle from the work stand	12			
8	TUNING THE CHASSIS.....	13			
8.1	Checking the basic chassis setting with rider's weight.....	13			
8.2	Checking the basic setting of the fork.....	13			

1.1 Symbols used

The meaning of specific symbols is described below.



Indicates an expected reaction (e.g. of a work step or a function).



Indicates an unexpected reaction (e.g. of a work step or a function).



All work marked with this symbol requires specialist knowledge and technical understanding. In the interest of your own safety, have these jobs performed by a WP Authorized Center! There your WP chassis will be treated with the optimum care and attention by specially trained experts using the necessary special tools.



Indicates a page reference (more information is provided on the specified page).



Indicates information with more details or tips.



Indicates the result of a testing step.



Indicates the end of an activity, including potential rework.

1.2 Formats used

The typographical formats used in this document are explained below.

Proprietary name	Indicates a proprietary name.
Name[®]	Indicates a protected name.
Brand[™]	Indicates a brand available on the open market.
<u>Underlined terms</u>	Refer to technical details or indicate technical terms, which are explained in the glossary.

2.1 Use definition – intended use

This chassis component is designed and built to withstand the normal stresses and strains of regular racing.



Info

Only use this chassis component in closed-off areas remote from public road traffic.

Your WP Authorized Center can inform you whether a factory approval for use on public roads may have been issued for your chassis components.

Only use this chassis component in the vehicle for which the chassis component is approved and/or recommended.

2.2 Misuse

The chassis component must only be used as intended.

Dangers can arise for people, property and the environment through use not as intended.

Any use of the chassis component beyond the intended and defined use constitutes misuse.

Misuse also includes the use of operating and auxiliary fluids which do not meet the required specification for the respective use.

2.3 Safety advice

A number of safety instructions need to be followed to operate the product described safely. Therefore read this instruction and all further instructions included carefully. The safety instructions are highlighted in the text and are referred to at the relevant passages.



Info

Various information and warning labels are attached in prominent locations on the product described.

Do not remove any information or warning labels. If they are missing, you or others may not recognize dangers and may therefore be injured.

2.4 Degrees of risk and symbols



Danger

Identifies a danger that will immediately and invariably lead to fatal or serious permanent injury if the appropriate measures are not taken.



Warning

Identifies a danger that is likely to lead to fatal or serious injury if the appropriate measures are not taken.

Note

Identifies a danger that will lead to considerable machine and material damage if the appropriate measures are not taken.

2.5 Safe operation



Danger

Danger of accidents A rider who is not fit to ride poses a danger to him or herself and others.

- Do not operate the vehicle and use chassis components if you are not fit to ride due to alcohol, drugs or medication.
- Do not operate the vehicle and use chassis components if you are physically or mentally impaired.

Only use the chassis component when it is in perfect technical condition, in accordance with its intended use, and in a safe and environmentally compatible manner.

If there are faults, which impair safety, have them immediately remedied in a WP Authorized Center.

Adhere to the information and warning labels on the chassis component.

2.6 Work rules

Special tools are necessary for certain tasks. The tools are not a component of the chassis component, but can be ordered using the number in parentheses.

During assembly, use new parts to replace parts which cannot be reused (e.g., seals, seal rings, O-rings).

In the case of certain screws, a thread locker (e.g. **Loctite**®) is required. Observe the manufacturer's instructions.

After disassembly, clean the parts that are to be reused and check them for damage and wear. Change damaged or worn parts.

After completing a repair or service work, check the operating safety of the chassis component.

2.7 Environment

If you use your chassis component responsibly, you can ensure that problems and conflicts do not occur.

When disposing of used oil, other operating and auxiliary fluids, and used components, comply with the laws and regulations of the respective country.

2.8 Owner's Manual

It is important that you read this Owner's Manual carefully and completely before making your first trip. The Owner's Manual contains useful information and many tips on how to operate, handle, and service your motorcycle. This is the only way for you to find out how to set up the chassis component ideally and how to protect yourself from injury.

Keep the Owner's Manual in an accessible place to enable you to refer to it as needed.

If you would like to know more about the chassis component or have questions on the material you read, please contact a WP Authorized Center.

The Owner's Manual is an important part of the chassis component and must be handed over to the new owner if the vehicle is sold.

2.9 Correct installation

Correct installation analogously to original components and in accordance with the instructions of the vehicle manufacturer is essential for ensuring maximum safety and functionality.

It is therefore strongly recommended that you have the chassis component installed at a WP Authorized Center.

2 SAFETY ADVICE

2.10 Chassis tightening torques

Unless otherwise stated, the tightening torques that apply are those in the vehicle manufacturer's instructions.

3.1 Manufacturer and implied warranty

The work prescribed in the service schedule must be carried out in a WP Authorized Center only, since otherwise no warranty claims will be recognized. Damage or secondary damage caused by tampering with and/or conversions on the chassis component are not covered by the warranty.

3.2 Fuel, auxiliary substances

Use operating and auxiliary substances (such as fuel and lubricants) as specified in the Owner's Manual.

3.3 Spare parts, accessories

For your safety, only use spare parts and accessory products that are approved and/or recommended by WP and have them installed in a WP Authorized Center. WP accepts no liability for other products and any resulting damage or loss.

Certain spare parts and accessory products are specified in parentheses in the descriptions. Your WP Authorized Center will be pleased to advise you.

3.4 Service

A prerequisite for perfect operation and prevention of premature wear is that the service, care, and tuning work is properly carried out as described in the Owner's Manual. Incorrect suspension setting can lead to damage and breakage of chassis components.

Use of the chassis component under difficult conditions, such on wet surfaces, can lead to considerably more rapid wear. For this reason, it may be necessary to inspect or replace parts before the next scheduled service. It is imperative that you adhere to the stipulated service intervals. If you observe these exactly, you will ensure a much longer service life for your chassis component.

3.5 Figures

The figures contained in the manual may depict special equipment.

In the interest of clarity, some components may be shown disassembled or may not be shown at all. It is not always necessary to disassemble the component to perform the activity in question. Please follow the instructions in the text.

3.6 Customer service


If you have any questions about your chassis component or WP, your WP Authorized Center will be pleased to advise you.

A list of WP Authorized Centers can be found on the WP website.

International WP Suspension website: <http://www.wp-suspension.com>

4 SERIAL NUMBERS

4.1 Cartridge article number

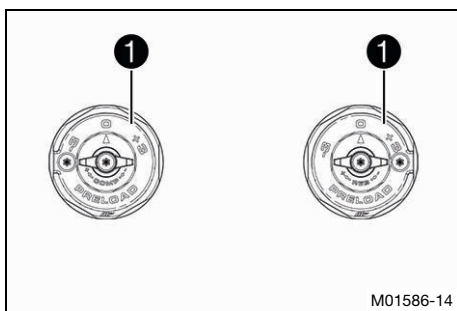

Cartridge article number ❶ is located on the side of the screw cap.



Info

The cartridge article number consists of an eight-digit number with a single letter in the sixth position.

5.1 Advice on preparing for first use



Warning

Danger of accident Modifications to the suspension setting may seriously alter the handling characteristic.

Extreme modifications to the suspension setting may cause a serious deterioration in the handling characteristic and overload components.

- Only make adjustments within the recommended range.
- Ride slowly to start with after making adjustments to get the feel of the new handling characteristic.

- Adjust the compression damping of the fork. (📖 p. 13)
- Adjust the rebound damping of the fork. (📖 p. 14)
- Adjust the spring preload of the fork. (📖 p. 14)




5.2 Checks and maintenance measures when preparing for use



Info

Before every use, check the condition of the chassis component and ensure that it is safe to operate. The chassis must be in perfect technical condition when it is being operated.

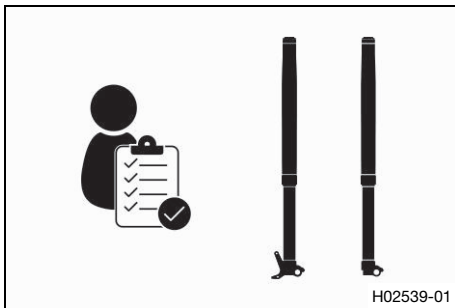

- Check chassis component for damage.
- Clean the dust boots of the fork legs.
- Bleed the fork legs. (📖 p. 12)
- Check all screw connections to ensure that they are tight.



6 SERVICE SCHEDULE

6.1 Additional information

Any further work that results from the required work or from the recommended work must be ordered separately and can be invoiced separately.
Different service intervals may apply in your country, depending on the local operating conditions.

6.2 Required work

every 20,000 km (12,400 mi)	
Service the fork. 	<input checked="" type="radio"/>

- Periodic interval

6.3 Recommended work

after 5,000 km (3,100 mi)	
Service the fork. 	<input type="radio"/>


- One-time interval

7.1 Raising the motorcycle with work stand

Note


Danger of damage The parked vehicle can roll away or fall over.

- Park the vehicle on a firm and level surface.

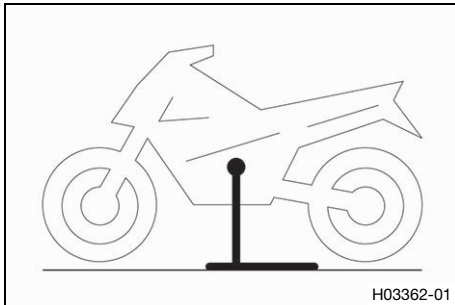


- Raise the motorcycle in accordance with the vehicle manufacturer's instructions.
- ✓ Neither wheel is in contact with the ground.
- Secure the motorcycle against falling over.

7.2 Removing the standard fork legs

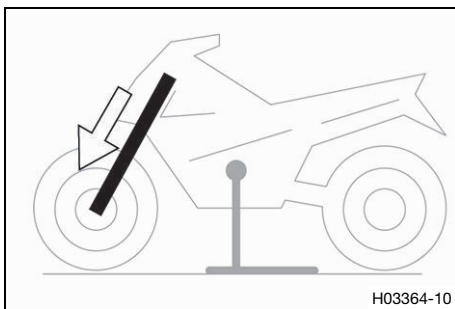

- Remove the standard fork legs as per the instructions of the vehicle manufacturer.
- Remove the standard cartridge in accordance with the instructions of the vehicle manufacturer.


7.3 Installing the WP PRO COMPONENTS fork legs

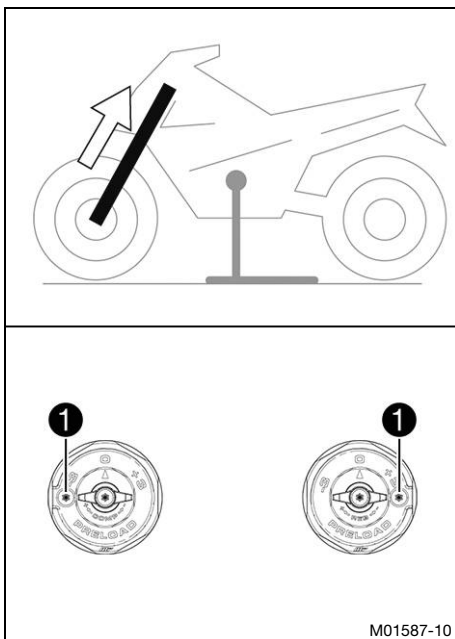

- Install the WP PRO COMPONENTS cartridge in accordance with WP Suspension fitting instructions.
- Install the fork legs in accordance with the instructions of the vehicle manufacturer.
- ✓ Bleeder screws **1** on the left fork leg point to the left, the bleeder screws on the right fork leg point to the right.
- ✓ Adjusting screw **COMP** is located at the upper end of the left fork leg.
- ✓ Adjusting screw **REB** is located at the upper end of the right fork leg.
- Attach the stickers (included).

7 SERVICE WORK ON THE CHASSIS

7.4 Bleeding the fork legs

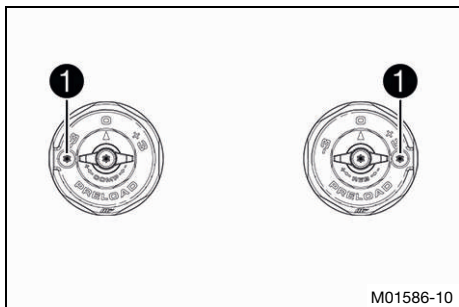

Preparatory work

- Raise motorcycle with work stand. (🔧 p. 11)

Main work

- Release bleeder screws ①.
 - ✓ Any excess pressure escapes from the interior of the fork.
- Tighten the bleeder screws.

Finishing work


- Remove the motorcycle from the work stand. (🔧 p. 12)

7.5 Removing the motorcycle from the work stand

Note


Danger of damage The parked vehicle can roll away or fall over.

- Park the vehicle on a firm and level surface.

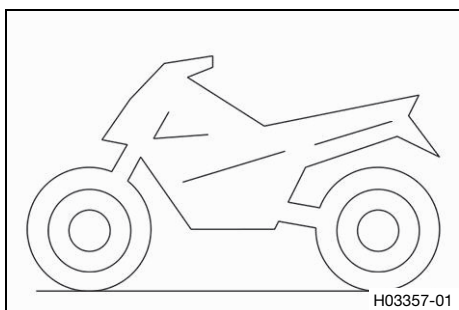

- Remove the motorcycle from the work stand in accordance with the vehicle manufacturer's instructions.
- Remove the work stand.

8.1 Checking the basic chassis setting with rider's weight

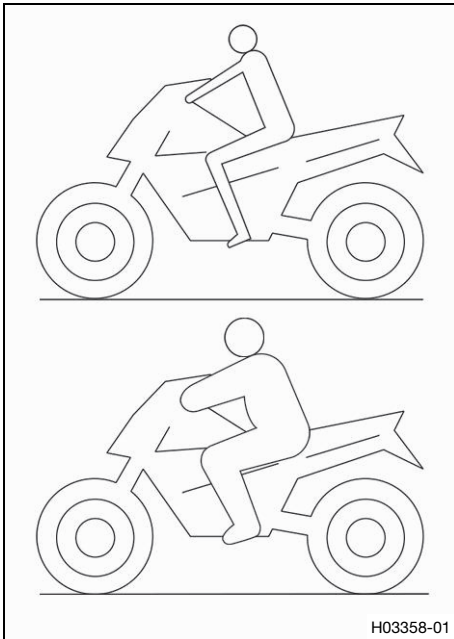

- For optimal motorcycle riding characteristics and to avoid damage to forks, shock absorbers, link fork and frame, the basic settings of the suspension components must match the rider's weight.

- This chassis component is factory set to a standard rider's weight.

Guideline

Standard rider weight	75 ... 85 kg (165 ... 187 lb.)
-----------------------	--------------------------------


- If the rider's weight is above or below this range, the basic setting of the suspension components must be adjusted accordingly.
- Minor differences in the rider's weight can be compensated for by modifying the spring preload.
- In case of larger differences, appropriate springs must be fitted.



8.2 Checking the basic setting of the fork

i Info

For various reasons, no exact riding sag can be determined for the fork.

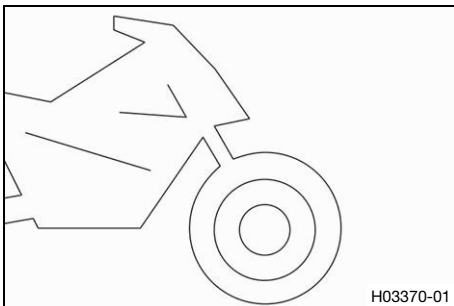


- As with the shock absorber, smaller differences in the rider's weight can be compensated by the spring preload.
- However, if the fork frequently bottoms out (hard end stop on compression), harder springs must be fitted to avoid damage to the fork and frame.
- If the fork feels unusually hard after extended periods of operation, the fork legs need to be bled.



8.3 Adjusting the compression damping of the fork

i Info

The hydraulic compression damping determines the fork suspension behavior.

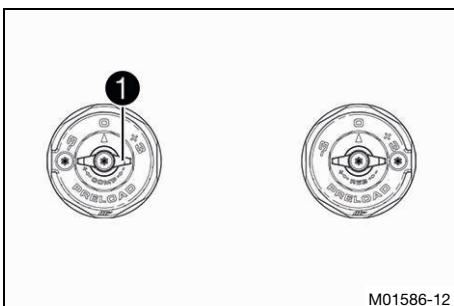

- Turn adjusting screw **1** clockwise up to the last perceptible click.


i Info

Adjusting screw **COMP 1** is located at the upper end of the left fork leg.

- Turn counterclockwise by the number of clicks corresponding to the fork type.


Guideline

Compression damping	
Comfort	20 clicks
Standard	15 clicks
Sport	10 clicks


 **Info**

Turn clockwise to increase damping; turn counter-clockwise to reduce damping.

8.4 Adjusting the rebound damping of the fork

 **Info**

The hydraulic rebound damping determines the fork suspension behavior.

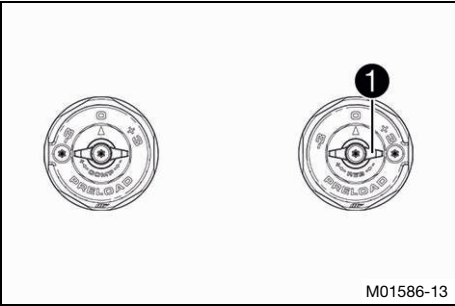

- Turn adjusting screw **1** clockwise up to the last perceptible click.


 **Info**

Adjusting screw **REB 1** is located at the upper end of the right fork leg.

- Turn counterclockwise by the number of clicks corresponding to the fork type.


Guideline

Rebound damping	
Comfort	20 clicks
Standard	15 clicks
Sport	10 clicks

 **Info**

Turn clockwise to increase damping; turn counter-clockwise to reduce damping.

8.5 Adjusting the spring preload of the fork


- Preparatory work**
- Raise motorcycle with work stand.  (p. 11)

- Main work**
- Turn the preload adjusters to the desired marking.

Guideline

Spring preload – preload adjuster	
Standard	0
Make the same adjustment on both fork legs.	

- ✓ The preload adjusters snap into place noticeably.

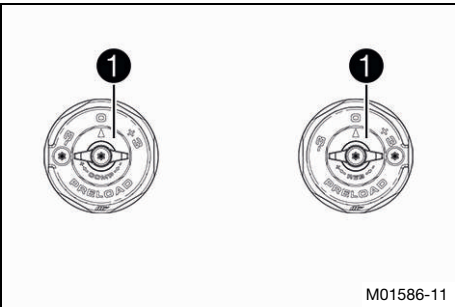



Info

Turn clockwise to increase the spring preload; turn counterclockwise to reduce the spring preload. Adjusting the spring preload has no influence on the absorption setting of the rebound. Basically, however, you should set the rebound damping higher with a higher spring preload.

Finishing work

- Remove the motorcycle from the work stand. (📖 p. 12)



9.1 Fork

Cartridge article number	53.27.2Q.81	
Cartridge	WP APEX PRO 6500	
Compression damping		
Comfort	20 clicks	
Standard	15 clicks	
Sport	10 clicks	
Rebound damping		
Comfort	20 clicks	
Standard	15 clicks	
Sport	10 clicks	
Spring preload – preload adjuster		
Standard	0	
Spring length with preload spacer(s)	360 mm (14.17 in)	
Spring rate		
Weight of rider: 65 ... 75 kg (143 ... 165 lb.)	8.5 N/mm (48.5 lb/in)	
Weight of rider: 75 ... 85 kg (165 ... 187 lb.)	9 N/mm (51 lb/in)	
Weight of rider: 85 ... 95 kg (187 ... 209 lb.)	9.5 N/mm (54.2 lb/in)	
Oil capacity, left cartridge	400 ml (13.52 fl. oz.)	Fork oil (SAE 4) (48601166S1) (📖 p. 17)
Oil capacity, right cartridge	400 ml (13.52 fl. oz.)	Fork oil (SAE 4) (48601166S1) (📖 p. 17)
Fork oil (📖 p. 17)	SAE 4	

Fork oil (SAE 4) (48601166S1)**Standard/classification**

- SAE (📖 p. 18) (SAE 4)

Guideline

- Use only oils that comply with the specified standards (see specifications on the container) and that exhibit the corresponding properties.

SAE

The SAE viscosity classes were defined by the Society of Automotive Engineers and are used for classifying oils according to their viscosity. The viscosity describes only one property of oil and says nothing about quality.

PA	Preload adjuster	Device on the suspension components that enables the adjustment of the spring preload
----	------------------	---

13 LIST OF ABBREVIATIONS

Art. no.	Article number
ca.	circa
cf.	compare
e.g.	for example
etc.	et cetera
i.a.	inter alia
no.	number
poss.	possibly

A	
Accessories	7
Auxiliary substances	7
B	
Basic chassis setting	
checking with rider's weight	13
C	
Cartridge	
article number	8
Correct installation	5
Customer service	7
E	
Environment	5
F	
Figures	7
Fork	
basic setting, checking	13
compression damping, adjusting	13
rebound damping, adjusting	14
spring preload, adjusting	14
Fork legs	
bleeding	12
standard version, removing	11
WP PRO COMPONENTS version, installing	11
Fuel, oils, etc.	7
I	
Implied warranty	7
Intended use	4
M	
Misuse	4
Motorcycle	
work stand, raising with	11
work stand, removing from	12
O	
Owner's Manual	5
P	
Preparing for use	
advice on preparing for first use	9
checks and maintenance measures when preparing for use	9
S	
Safe operation	5
Service	7
Service schedule	10
Spare parts	7

T	
Technical data	
chassis tightening torques	6
fork	16
U	
Use definition	4
W	
Warranty	7
Work rules	5



53000183en

04/2019