Accessory Fitting Instructions

Thank you for choosing this Triumph genuine accessory kit. This accessory kit is the product of Triumph's use of proven engineering, exhaustive testing, and continuous striving for superior reliability, safety and performance.

Completely read all of these instructions before commencing the installation of the accessory kit in order to become thoroughly familiar with the kit's features and the installation process.


These instructions should be considered a permanent part of your accessory kit, and should remain with it even if your accessory equipped motorcycle is subsequently sold.

Tank Pad Kit	
Kit Number	Models
A9798025, A9790116	Speed Triple S, Speed Triple R, Speed Triple RS
A9798051	Tiger 1200 GT Explorer, Tiger 1200 Rally Explorer
A9790094	Speed Triple 1200 RS, Speed Triple 1200 RR, Speed Triple 1200 RR Breitling, Speed Triple 1200 RX
A9790152	Street Triple R from VIN BF1297, Street Triple RS from VIN BF1297, Street Triple Moto2™ Edition, Speed Triple 1200 RS, Speed Triple 1200 RR, Speed Triple 1200 RR Breitling, Speed Triple 1200 RX

Publication part number 9900773 Issue 10
© Triumph Designs Ltd. 2025


Parts supplied

A9798025, A9790116

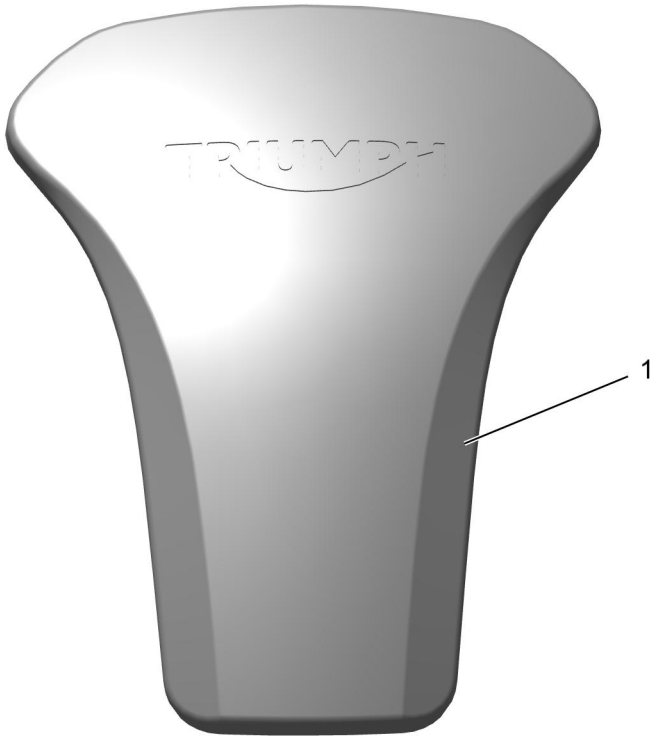


1. Tank Pad	1 off	2. Cleaning wipe (not shown)	1 off

A9798051

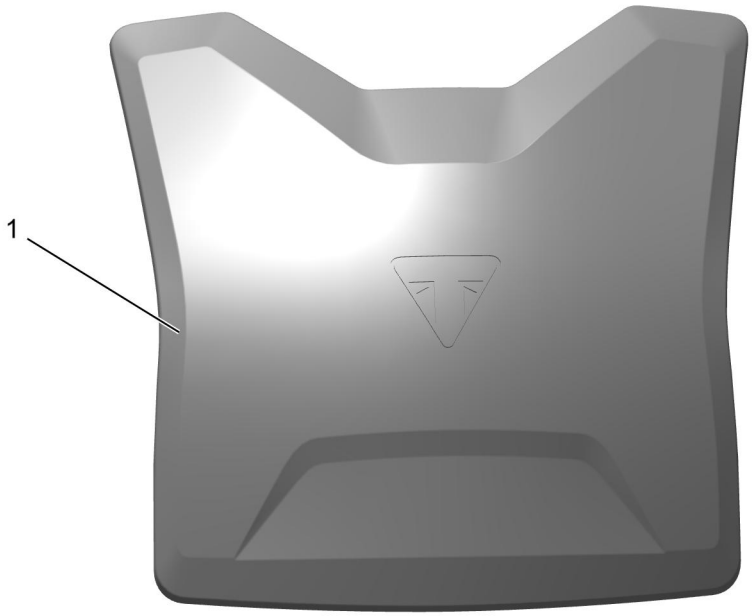

1. Tank Pad	1 off	2. Cleaning wipe (not shown)	1 off

A9790094, A9790152

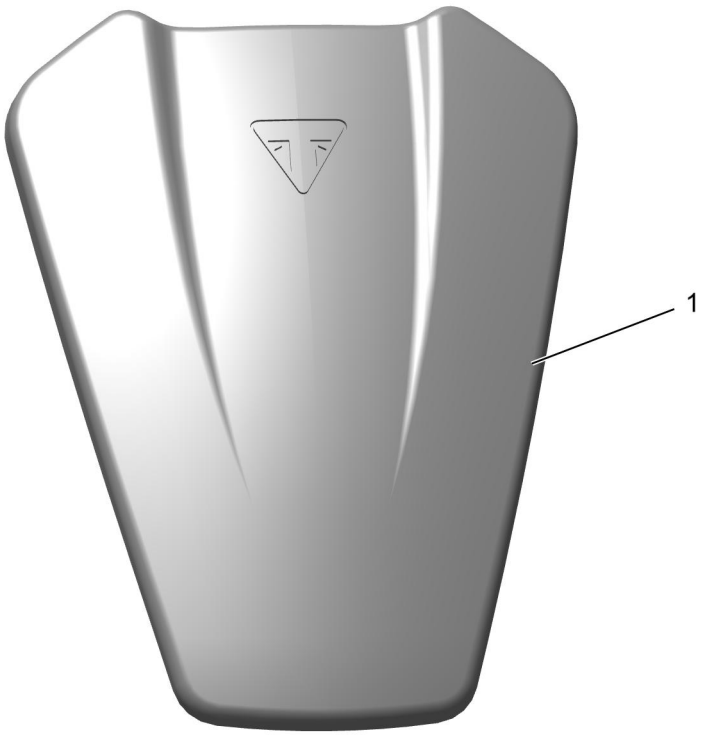

1. Tank Pad	1 off	2. Cleaning wipe (not shown)	1 off

⚠ WARNING

Fit only genuine Triumph accessories to those models approved by Triumph as listed in the associated Triumph fitting instructions.

The accessory kits covered in this instruction are designed for use on specific models of Triumph motorcycle. The accessory kits and the models applicable are listed at the start of the instruction. They should never be fitted to any other Triumph model or to any other manufacturer's motorcycle.

Fitting an accessory kit to a Triumph model not listed, or to any other manufacturer's motorcycle, will affect the performance, stability and handling of the motorcycle.

Failure to follow the advice above may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

Always have Triumph approved parts, accessories and conversions fitted by a competent person with the specialist knowledge and technical understanding of motorcycles, such as an authorised Triumph dealer.

The fitment of parts, accessories and conversions by a person without the specialist knowledge and technical understanding of motorcycles may affect the handling, stability or other aspects of the motorcycle's operation.

Failure to follow the advice above may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

A torque wrench of known accurate calibration must be used when fitting this accessory kit.

Failure to tighten any of the fasteners to the correct torque specification may affect motorcycle performance, handling and stability.

Failure to follow the advice above may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

Make sure the motorcycle is stabilised and adequately supported.

Do not support the motorcycle on any ancillary component, the exhaust system or any other non structural parts of the motorcycle frame.

A correctly supported motorcycle will help prevent it from falling.

An unstable motorcycle may fall resulting in motorcycle damage, serious injury or death.

NOTICE

Triumph offers a broad range of approved genuine accessories for your motorcycle.

We cannot therefore cover all possible equipment variations in these instructions. For removal and installation of Triumph Genuine Accessories, always refer to the instructions supplied with the respective accessory kit.

To obtain additional copies of any Triumph accessory instructions, visit www.triumphinstructions.com or contact your authorised Triumph dealer.

NOTICE

Once the tank pad has been fitted, it will become an integral part of the fuel tank and cannot be removed.

NOTICE

Read the warning notices printed on the cleaning wipe packet in the fitting kit

NOTICE

The surface to which the tank pad is affixed must be clean and dry to ensure that the adhesive has a sound base to adhere to. Use the cleaning wipe supplied for this purpose.

1. Using the cleaning wipe provided, clean the top surface of the fuel tank.

NOTICE

When fitting self-adhesive parts, take care to make sure that the positioning is correct and accurate.

After the adhesive has been attached to the mounting surface, there is no satisfactory method to remove or reposition if incorrectly aligned.


Initial bonding is instant, full bonding is achieved after 72 hours.

NOTICE

The minimum application temperature for the adhesive is 10°C

NOTICE


When positioning the tank pad ensure it is located centrally on the fuel tank.

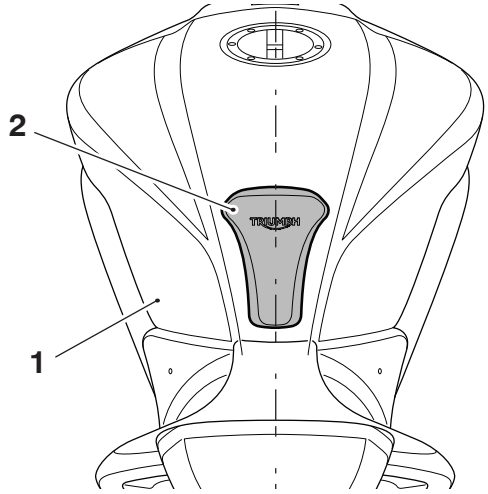

1. **Fuel tank (Speed Triple S shown)**
2. **Tank pad**


2. Peel away the adhesive backing strips from the tank pad.
3. Carefully position the tank pad on the fuel tank with the lower edge of the tank pad at the following dimension from the lower edge of the fuel tank:

- Speed Triple S, Speed Triple R, Speed Triple RS - Between 11 mm and 17 mm.

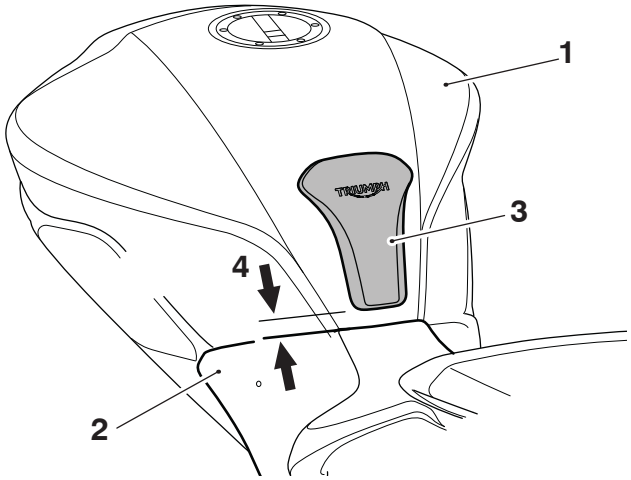


1. **Fuel tank**
2. **Rider seat**
3. **Tank pad**
4. **11 mm to 17 mm**

- Street Triple R from VIN BF1297, Street Triple RS from VIN BF1297, Street Triple Moto2™ Edition - Between 11 mm and 17 mm.

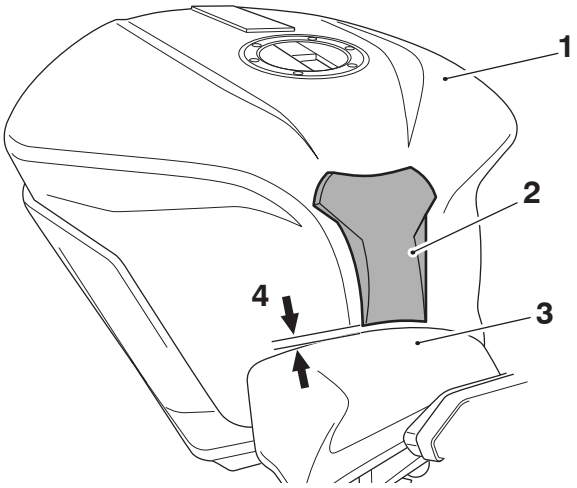


1. **Fuel tank**
2. **Tank pad**
3. **Rider seat**
4. **11 mm to 17 mm**

- Speed Triple 1200 RS, Speed Triple 1200 RR, Speed Triple 1200 RR Breitling, Speed Triple 1200 RX - Between 25 mm and 31 mm.

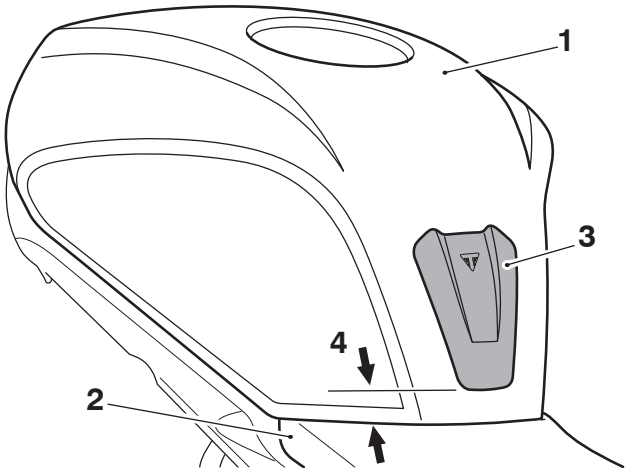

1. **Fuel tank**
2. **Rider seat**
3. **Tank pad**
4. **25 to 31 mm**

- Tiger 1200 GT Explorer, Tiger 1200 Rally Explorer - 19 to 21 mm.

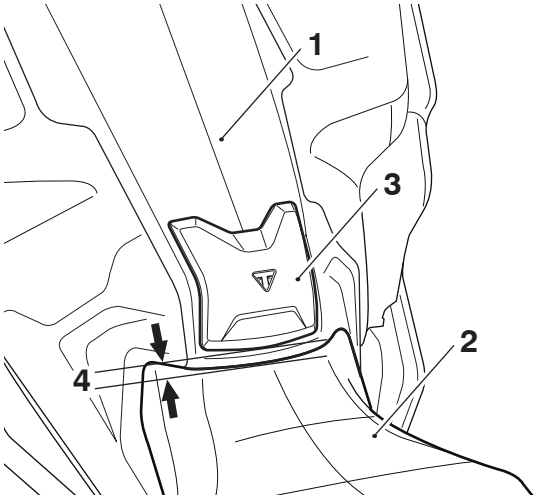

1. **Fuel tank**
2. **Rider seat**
3. **Tank pad**
4. **19 to 21 mm**

4. Apply firm and even hand pressure across the whole tank pad surface for one minute to ensure a good bond is achieved.

⚠ WARNING

After fitting the accessory kit, the motorcycle will exhibit new handling characteristics.

Operate the motorcycle in a safe area free from traffic to gain familiarity with any new characteristics.

Operation of the motorcycle when not familiar with any new handling characteristics may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

If, after fitting this accessory kit, you have any doubt about the performance of any aspect of the motorcycle, contact a competent person with the specialist knowledge and technical understanding of motorcycles, such as an authorised Triumph dealer.

Riding a motorcycle when there is any doubt as to any aspect of the performance of the motorcycle may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

Never ride an accessory-equipped motorcycle at speeds above 80 mph (130 km/h).

Remember that the 80 mph (130 km/h) limit will be reduced by the fitting of non-approved accessories, incorrect loading, worn tyres, overall motorcycle condition and poor road or weather conditions.

The presence of accessories will cause changes in the stability and handling of the motorcycle. Failure to allow for changes in motorcycle stability may lead to loss of motorcycle control which could result in serious injury or death.

⚠ WARNING

High-speed operation should only be attempted by riders who have been instructed in the techniques necessary for high-speed riding and are familiar with the motorcycle's characteristics in all conditions.

Only operate this Triumph motorcycle at high speed in closed-course, on-road competition or on closed-course racetracks.

High-speed operation in any other circumstances is dangerous and may lead to loss of motorcycle control which could result in serious injury or death.

NOTICE

The motorcycle must not be operated above the legal road speed limit except in closed-course conditions.